

# AC Adapter

## GDPS-C112D-2.5-UL

### Product Overview

Introducing the GDPS-C112D-2.5-UL AC Adapter – the pinnacle of power efficiency and safety.

With a universal AC input range (100~240V) and a steady +12V DC output, it offers seamless compatibility worldwide for various devices.


Safety and environmental considerations are paramount, meeting stringent noise and safety standards while minimizing environmental impact.

Say goodbye to power concerns and hello to reliable energy with the GDPS-C112D-2.5-UL AC Adapter.

### Input Characteristics:

- Rated Input Voltage: 100-240Vac
- Input Voltage Range: 90-264Vac
- Rated Frequency: 50-60Hz
- Frequency Range: 47-63Hz
- AC Input Current: 0.8A max
- Standby Power: 0.1W at 155 or 230Vac

### DESIGNED FOR CABLE MODEMS

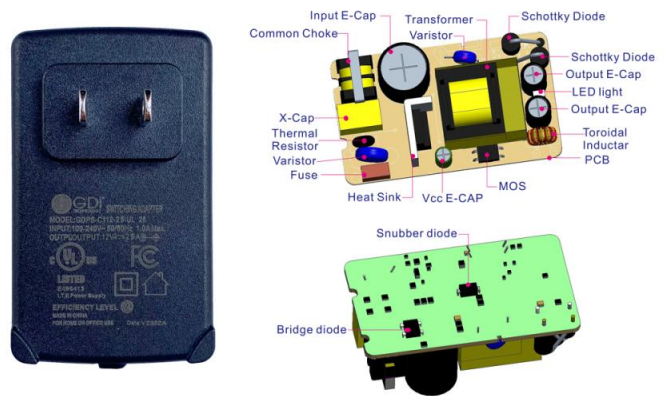

### Output Characteristics:

- Rated Output Voltage: 12V ± 0.0V (no load), 12V ± 0.3V (full load, I=2.5A)
- Rated Output Load: 2.5A
- Ripple & Noise: 150mV p-p (at full load 2.5A)
- Protection Characteristics:

- Maximum Output Current: 2.5A with auto-recovery function (at 100-240Vac input)
- Connector: DC Plug

- Input Plug Type: USA-pin, 2 Conductors
- Weight: 85 ± 5g
- Size: 58.4 (L) x 43.3 (W) x 28 (H) mm

